


## LOGIC Aluminium Grid Matting

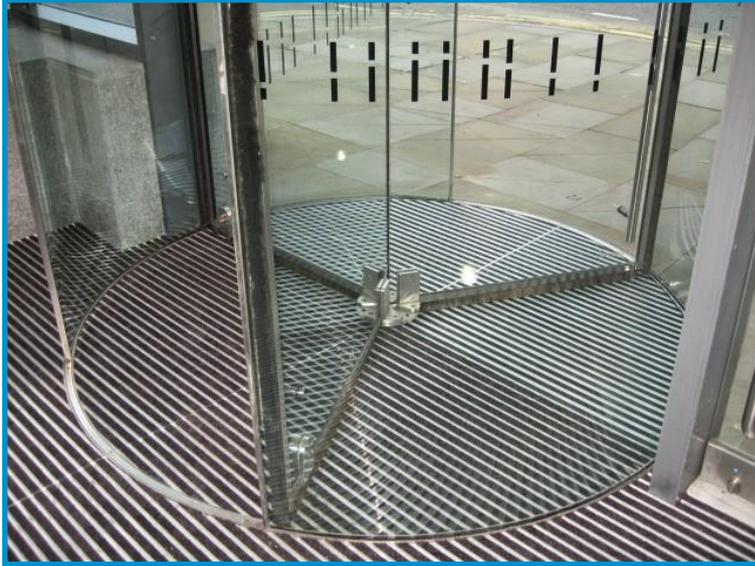

**LOGIC** Aluminium Grid Matting  
Interior - ACTIVE Tread, Exterior - Rib Rubber Tread

**LOGIC** solid construction is performing in the most demanding commercial entranceway environments.

**LOGIC** scraper channel grid, complete with active pile wipers ensures maximum moisture and debris removal and retention



**LOGIC** entrance matting systems are manufactured to ISO9002 standards and conform to BS8300 DDA regulations. The EMD warranty is built on an inventory of industry leading materials for long, dependable service.

### Description

**LOGIC** is a primary matting system for specification in commercial applications where the removal of footborne and wheeled-in soilage at entranceways is essential in retail stores, airports, shopping centres, schools and hospitals. **LOGIC** will withstand heavy and wheeled traffic use. The matting can be supplied in single width panels of up to 4000mm for a seamless appearance and can easily be supplied to the most demanding design requirement. The modules may be surface laid or recess fitted as required. All contact treads are replaceable for refurbishment purposes.

- *Efficient High Capacity Grid*
- *Finishes for all applications*
- *Elegant seamless panels*
- *Matwell or surface fitting*
- *Long term warranty*

**LOGIC** is out front at many leading High Street facilities. Its clean

lines and elegant appearance make it an easy choice for any commercial installation. **LOGIC** provides a compelling alternative wherever aluminium grid matting is preferred.

A closed construction design, **LOGIC** deals with windblown and footborne grit avoiding the need to constantly lift the matting for cleaning. The **LOGIC** 'U' channel ensures optimum collection of moisture and soilage at the contact tread surface from where it can be easily removed by vacuum cleaning.

With a range of contact treads to suit internal or outdoor installations, **LOGIC** is an ideal choice for any matting specification.

**LOGIC** is manufactured in single width panels of up to 4 metres in length for a seamless appearance and can be supplied to suit any depth of recess frame.

**Frames:** Available in aluminium, brass or stainless steel. Straight lengths or notched profiles for site adjustment to curves. Choice of ramp and threshold profile for surface fitting.



# LOGIC

## Aluminium Grid Entrance Matting

---

### TECHNICAL Specification

<b>Reference:</b>	<b>LOGIC</b> Aluminium Grid Entrance Matting
<b>Conformity:</b>	Manufactured to ISO9002 Standard. Conforms to current BS8300 DDA regulations.
<b>Grid construction:</b>	Aluminium - minimum 80% recycled content in closed construction format.
<b>Treads:</b>	From ACTIVE / PolyRIB / BRUSH / Rubber Rib ranges
<b>Total thickness:</b>	12mm or 18mm
<b>Module Size:</b>	<b>LOGIC</b> panels are manufactured specifically to customer requirements. Panels widths up to 4000mm left to right as required.
<b>Fire rating:</b>	Class: Low BS 4790 (Hot Metal Nut Test): 1987 mean radius of burning BS EN150 11925:2002, BS EN9239-1: Crucial radian flux test

---

### TYPICAL Specification

#### **N10 GENERAL FIXTURES/FURNISHINGS/EQUIPMENT 300 ENTRANCE MATTING / 40 MISCELLANEOUS FITTINGS**

<b>Reference:</b>	<b>LOGIC</b> Aluminium Grid Entrance Matting
<b>Manufacturer:</b>	Entrance Matting Direct Limited (0161 720 8077)
<b>Size:</b>	As detailed
<b>Height:</b>	12mm or 18mm
<b>Tread Colour:</b>	To be determined
<b>Installation:</b>	Recessed in matwell or surface-laid with ramping frame.