




## PROSKIRTING SHELL

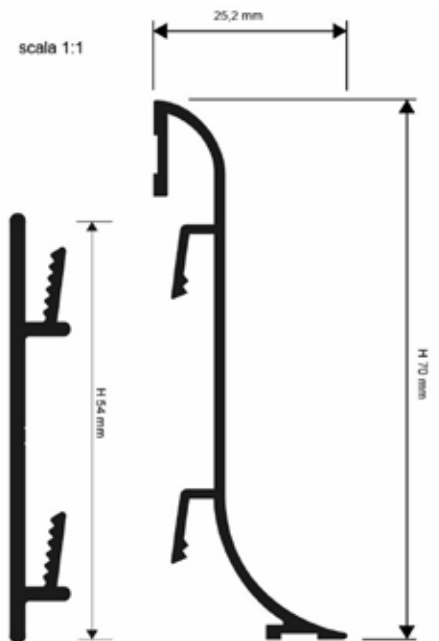

### DESCRIPTION

**PROSKIRTING SHELL** is an aluminium cove-shaped skirting board profile. Thanks to its radius of curvature, the profile is easy to clean and therefore suitable for hygienic environments. The profile, after laying, thanks to its special geometry, appears like a normal skirting board with a modern and elegant design.

### MATERIAL

**PROSKIRTING SHELL** is an anodized silver aluminium cove-shaped skirting board profile, with a height of 70 mm. Thanks to its radius of curvature, it is particularly suitable for ensuring cleanliness and hygiene. It is designed for installing low-voltage electrical cables such as web, telephone and satellite TV cables. The profile allows to cover perimeter joints of 25 mm and can be fixed directly to the wall (non-inspectionable adhesive version PKSHAA 70A) or to supports (inspectionable version PKSHAA 70). The punched aluminium support pieces 20 mm long must be fixed to the wall with screws, about every 50 cm.

**PROSKIRTING SHELL**, thanks to the availability of special pieces such as internal and external corners, junctions and end caps, allows for easy installation and workmanlike finish.

### AREAS OF USE

**PROSKIRTING SHELL** in aluminium is suitable for every indoors environment.

### WARNINGS

Do not use **PROSKIRTING SHELL** in aluminium outdoors and in environments where aggressive substances are present. Do not use the adhesive version on porous supports.

### MAINTENANCE

**PROSKIRTING SHELL** does not require any special maintenance; it is suggested to clean it with normal household cleaning products.

### LAYING INSTRUCTIONS

1. Cut "**PROSKIRTING SHELL**" to the desired length.

#### Adhesive version

2. Remove all remains of oil, grease and dirt from the surface where the profile will be laid.
3. When the surface is dry, remove the silicone film.
4. Place the profile correctly and press it without hitting.

#### With support version

2. Fix the punched support to the wall with screws every 50 cm.
3. If expected, laying the low-voltage electric cables like web, computer, telephone and satellite TV.
4. Attach the profile to the support applying low pressure.

### TEXT TEMPLATE FOR TENDERS

Delivery and installation of anodized silver aluminium cove-shaped skirting board profile, with a height of 70 mm. It can be fixed to the wall with adhesive (non-inspectionable version PKSHAA 70A) / with punched aluminium supports (inspectionable version PKSHAA 70), 20 mm long, that can be fixed to the wall with screws every 50 cm. The profile allows to cover perimeter joints of 25 mm and is provided with special pieces such as internal and external corners, end caps and junctions, like PROSKIRTING SHELL of the Progress Profiles company.

**PKSHAA 70/70A:** Anodized silver aluminium

Profile height : \_\_\_\_\_ mm  
 Profile Length : \_\_\_\_\_ mt  
 Material : \_\_\_\_\_ €/mt  
 Installation : \_\_\_\_\_ €/mt  
 Total value : \_\_\_\_\_ €/mt