Facility Flooring

QUATTRO

Flexible Modular Entrance Matting



Unique Design Features

Each square metre of **QUATTRO** entrance matting features forty interactive wiper treads combining absorbent tufted Nylon with twin rubber squeegee ribs for extra grip and maximum grit and water removal in a unique cleaning action. The distinctive channel grid has a high capacity for moisture and debris collection.

QUATTRO offers a choice of tread options to match most popular floor finishes.

Safety and Performance

Designed to perform in the most demanding of commercial entranceway environments, QUATTRO is ideal for use in institutional facilities. The modules are sound non-reflective and reassuringly secure absorbing, underfoot providing unparalleled grip even in wet conditions achieving impressive Satra** safety rating. Moulded from natural rubber, QUATTRO forms a substantial and safe entranceway wherever it is installed.

Installation

The practical design is ideal for recessed matwell or surface level applications. Entirely non-metallic, the system is also suitable for placement around entranceway tagging equipment. The smooth flexible underside ensures flat-to-floor fitting and a level upper surface. There are no clips or fixings required. The modules can be simply trimmed to suit any shape and either loose laid or fully bonded as required.

Maintenance

Captured grit and moisture is channelled away from the contact surface into the grid surround from where it is simply removed by vacuum cleaning to maintain its effectiveness and attractive appearance. The flexible modules are interchangeable for maximum durability and may be individually replaced to economically extend the wear value of the whole installation.

- Responsive, interactive tread design*
- Tested for slip resistance by Satra**
- Convenient 50cm modular format
- Sound absorbing, non reflective
- TEN year warranty assurance
- Simple no tools installation
- Matwell or surface fitting



Quality

Made in the **UK** from world class materials, **QUATTRO** entrance matting is manufactured to ISO9002 standards and conforms to BS8300 DDA.


* Responsive, interactive tread explained

The moulded solid rubber base features a matrix of channels and raised treads comprising individual textile pads each enclosed in flexible twin squeegee

The squeegees remove moisture and grit and protect the textile fibre against pile flattening keeping it 'live' to promote quicker drying and easier cleaning.

Walkover action flexes the squeegees and millions of fibre tips in a responsive, interactive movement that directs moisture and grit away from the contact surface and into the collection channels preventing ongoing transfer into the building.

**Satra - Tested to BS7976-2:2002 by Satra Technology, the global research and testing organisation.

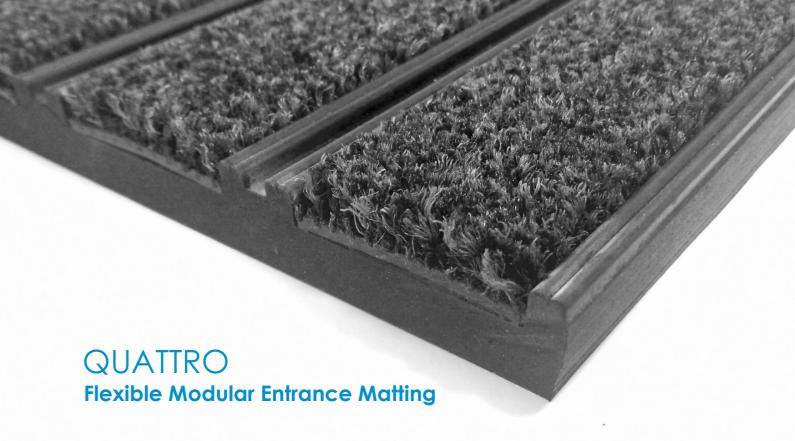

Description

QUATTRO is a flexible modular entrance matting system for specification in commercial applications where the removal of footborne and wheeled-in soilage at entranceways is essential in retail stores, airports, shopping centres, schools and hospitals. **QUATTRO** will withstand heavy and wheeled traffic use.

The modules may be surface laid or recess fitted as required. **QUATTRO** can be laid in a linear or multi-directional format.

The tread material is also available in sheet form for secondary barrier matting system requirements to complement and coordinate with the **QUATTRO** primary matting system.

TECHNICAL Specification

Reference: QUATTRO Flexible Modular Entrance Matting

Conformity: Manufactured to ISO9002 Standard. Conforms to current BS8300 DDA regulations.

Construction: SBR Rubber Moulded Base with Textile Contact Surface

Total thickness: 11mm or 18mm

Module Size: QUATTRO modules 50cm x 50cm

Slip Resistance: Conforms to BS7976 - 2:2002

Installation: Recessed in matwell or surface-laid with optional ramping frame.