


Technical Data Sheet:  
Clean Poly (ryps plus)

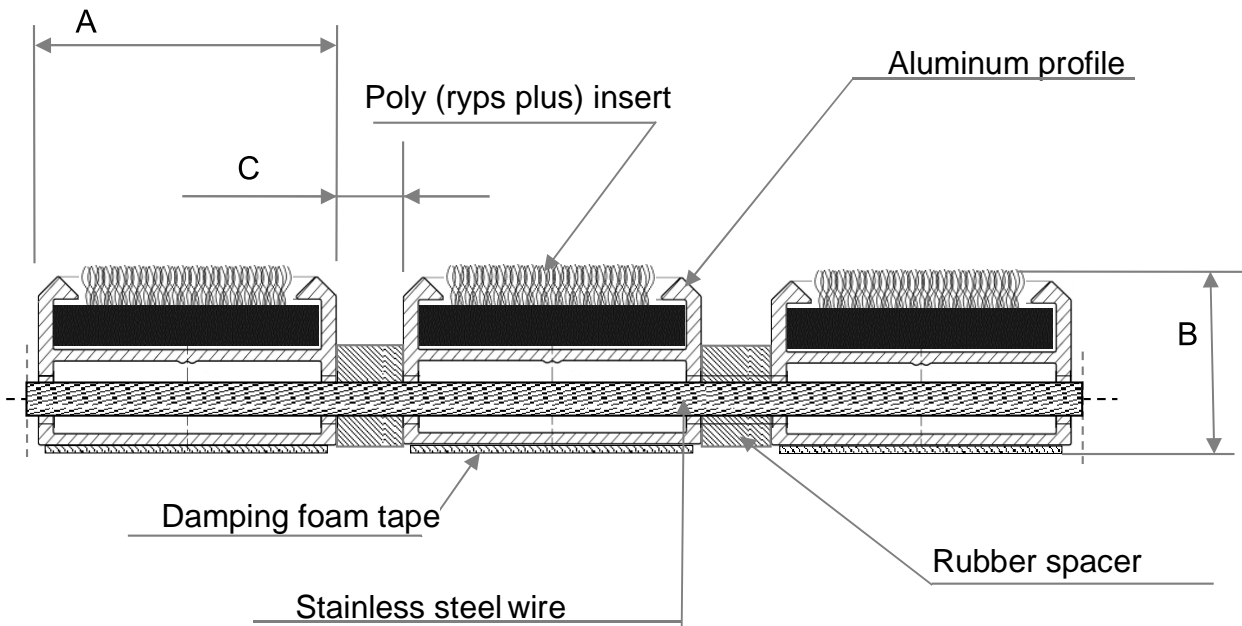

	A [mm]	B [mm]	C [mm]
Clean system Poly 12	30	11,5	3 – 6,5
Clean system Poly 17	30	15,5	3 – 6,5
Clean system Poly 22	30	19,5	3 – 6,5
Clean System Poly 27	31	24,5	3 – 6,5
Clean system Poly 22 Strong	32	19,5	3 – 6,5

**PRODUCT SPECIFICATION:**

Doormats Clean System Poly are made of aluminum with Ryps insert. Profiles are coupled with stainless steel cord. Aluminum profiles are separate with rubber spacers. Construction allow us to easy roll for clearing and transporting the mat. Under aluminum profile is dumping tape.

Free space between aluminum profiles can have between 3mm and 4,5mm.

Construction of doormats allow us to manufacture mats in any dimensions and shapes. Width of the mat is obtained as a result of cutting the profiles and length is obtained as a result of adding aluminum profiles and squeezing rubber spacers.

Hygienic Certificate	HK/B/0628/01/2014
Anti-slip norm according to DIN 51130:2014	R11
Fire classification according to PN-EN 13501-1+A1:2010	C <sub>fl</sub> -s1
Material of aluminum profile	EN AW 6063 T6
Stationary load	2 500 kg/100 cm <sup>2</sup> - standard version 3 400 kg/100 cm <sup>2</sup> - strong version
INSERT	
Manufacturing process	Tufted
Pile composition	100% polyamide 6.0
Pile weight	750 g/m <sup>2</sup> +/- 10%
Pile height	5,5 mm +/- 10%
Total weight	3440 g/m <sup>2</sup> +/- 10%
Total thickness	8 mm +/- 10%

