


## ENTRANCE MATTING SYSTEM CLEAN SYSTEM RYPS

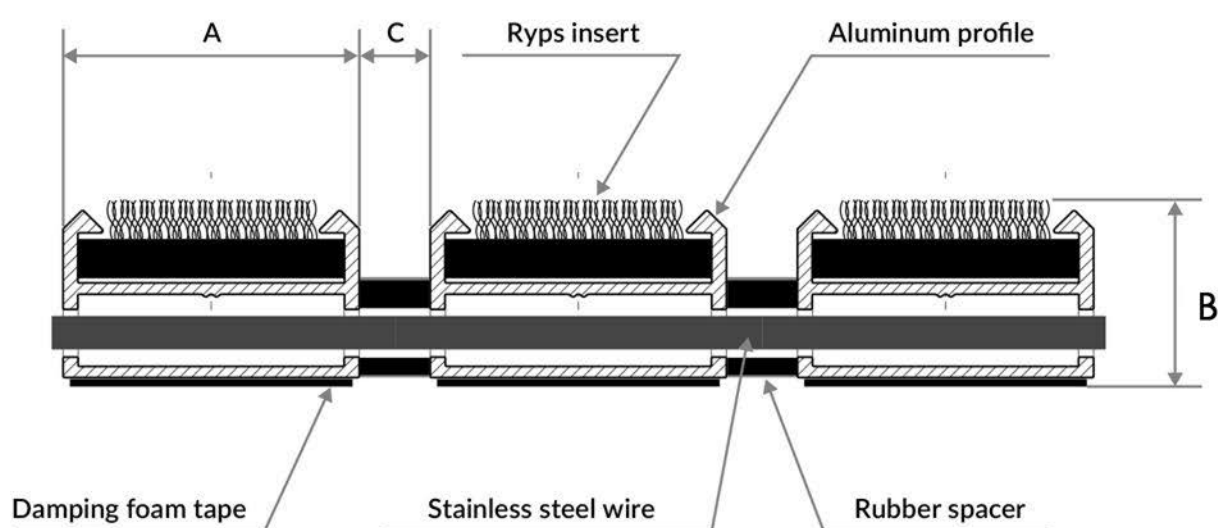

	A [mm]	B [mm]	C [mm]
Clean System Ryps 12	30	14	3 - 4,5
Clean system Ryps 17	30	18	3 - 4,5
Clean system Ryps 22	30	22	3 - 4,5
Clean System Ryps 27	31	27	3 - 4,5
Clean system Ryps 22 strong	32	22	3 - 4,5

### ■ PRODUCT SPECIFICATION:

Doormats Clean System Ryps are made of aluminum with Ryps insert. Profiles are coupled with stainless steel cord. Aluminum profiles are separate with rubber spacers. Construction allow us to easy roll for clearing and transporting the mat. Under aluminum profile is dumping tape.

Free space between aluminum profiles can have between 3mm and 4,5mm.

Construction of doormats allow us to manufacture mats in any dimensions and shapes. Width of the mat is obtained as a result of cutting the profiles and length is obtained as a result of adding aluminum profiles and squeezing rubber spacers.

Clean System Ryps	
Hygienic Certificate	HK/B/0628/01/2014
Anti-slip norm according to DIN 51130:2014	R11
Fire classification according to PN-EN 13501-1+A1:2010	C <sub>fl</sub> - s1
Material of aluminum profile	EN AW 6063 T6
Stationary load	2 500 kg/100 cm <sup>2</sup> - standard version 3 400 kg/100 cm <sup>2</sup> - strong version
Ryps insert	
Manufacturing process	felting
Pile composition	100% polypropylene
Pile weight	1 500 g/m <sup>2</sup> +/- 10%
Pile hight	4,5 mm +/- 10%
Total weight	2 100 g/m <sup>2</sup> +/- 10%
Total thickness	10 mm +/- 10%
Permanently antistatic material	ISO 6356