


ZERO CURVE

TOP + PIN INSERT + ALUMINIUM BASE
27 wood finishes and 6 anodised finishes

The **ZERO CURVE** range comprises a large assortment of terminal transition profiles for joining floors at different levels and with different thickness varying from 7 to 22 mm. Twenty-seven wood-effect finishes are available: light maple - dark maple - light beech - dark beech - light durmast - dark durmast - light cherry - dark cherry - walnut - wenge... plus six anodised finishes (3 available on demand). There is a profile (top) and an insert (pin) for each height, while the base (punched or perforated) allows fixing by screwing or gluing.

transition profiles

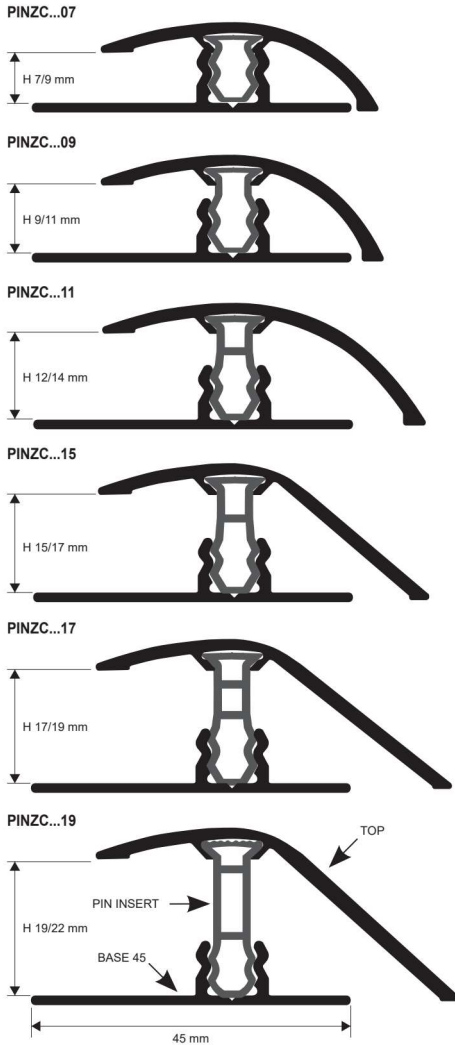

ALU. TOP + PIN INSERT + ALU. BASE 45 PUNCHED/PERFORED
(6 anod. al. finishes of which 3 on demand) - bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm
PINZC... 07 (PIN insert 09)	7 / 9
PINZC... 09 (PIN insert 11)	9 / 11
PINZC... 11 (PIN insert 13)	12 / 14
PINZC... 15 (PIN insert 15)	15 / 17
PINZC... 17 (PIN insert 17)	17 / 19
PINZC... 19 (PIN insert 19)	19 / 22

ALU. TOP + PIN INSERT + ALU. BASE 45 PUNCHED/PERFORED
(27 wood finishes) - bar length 2,7 LM - pack. 20 Pcs - 54 LM

Article	H mm
PINZC... 07 (PIN insert 09)	7 / 9
PINZC... 09 (PIN insert 11)	9 / 11
PINZC... 11 (PIN insert 13)	12 / 14
PINZC... 15 (PIN insert 15)	15 / 17
PINZC... 17 (PIN insert 17)	17 / 19
PINZC... 19 (PIN insert 19)	19 / 22


COMPLETE

Available in the finishes: AO - AA - AB - 01W - 02W - 03W - 04W - 05W - 06W - 07W - 08W - 09W - 10W - 11W - 12W - 13W - 14W - 15W - 16W - 17W - 18W - 19W - 20W - 21W - 22W - 23W - 24W - 25W - 26W - 27W (AT, CH and SB available upon request with a minimum quantity order of 540 LM). The code of the selected colour must be added to the article code. E.g.: PINZC... 07 (chosen finish Anod. gold) PINZCAO 07.

COMPLETE

ALU. TOP + PIN INSERT + ALU. BASE 45 PUNCHED/PERFORED
(6 anod. al. finishes of which 3 on demand) - bar length 0,90 LM 

Article	H mm
PINZC... 07S (PIN insert 09)	7 / 9
PINZC... 09S (PIN insert 11)	9 / 11
PINZC... 11S (PIN insert 13)	12 / 14
PINZC... 15S (PIN insert 15)	15 / 17
PINZC... 17S (PIN insert 17)	17 / 19
PINZC... 19S (PIN insert 19)	19 / 22

ALU. TOP + PIN INSERT + ALU. BASE 45 PUNCHED/PERFORED
(27 wood finishes) - bar length 0,90 LM 

Article	H mm
PINZC... 07S (PIN insert 09)	7 / 9
PINZC... 09S (PIN insert 11)	9 / 11
PINZC... 11S (PIN insert 13)	12 / 14
PINZC... 15S (PIN insert 15)	15 / 17
PINZC... 17S (PIN insert 17)	17 / 19
PINZC... 19S (PIN insert 19)	19 / 22

Available in the finishes: AO - AA - AB - 01W - 02W - 03W - 04W - 05W - 06W - 07W - 08W - 09W - 10W - 11W - 12W - 13W - 14W - 15W - 16W - 17W - 18W - 19W - 20W - 21W - 22W - 23W - 24W - 25W - 26W - 27W (AT, CH and SB available upon request with a minimum quantity order of 500 LM). The code of the selected colour must be added to the article code. E.g.: PINZC... 07S (chosen finish Anod. gold) PINZCAO 07S.

EXAMPLES AND INSTRUCTIONS FOR LAYING METHODS



1: Fix and/or glue the base to the floor. 2: Align the laminate/melamine/wood floor, ensuring that approx. 3/10mm gap is left on each side to accommodate the natural expansion between the floor and the base. 3: Choose the desired profile, if necessary cut TOP, PIN and BASE at the needed length and then insert the PIN in the TOP in the specific "dovetail" seat. The position the profile above the U-shaped snap-in seat of the base. 4: With the aid of a board, hammer the TOP to the desired fitting level.

COLOURS

(for a precise assessment of colours and finishes, see the relative enclosed sheet)

